






AquaTraxx 5/8" Tape Feet Per Roll				
15 mil	12 mil	10 mil	8 mil	6 mil
4,000'	5,100'	6,000'	7,500'	10,000'

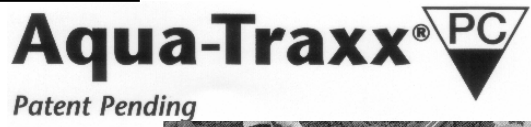

- 5/8" Aqua-Traxx Drip Tape**
- 15, 12, 10, 8, 6, & 4 mil wall thickness
 - 4", 8", 12", 16", or 24" outlet spacing
 - 8-10psi optimum operating pressure
 - Blue Stripe "up" to aid installation
 - Turbulent flow path = better uniformity
- See Spec Charts on previous Tape page

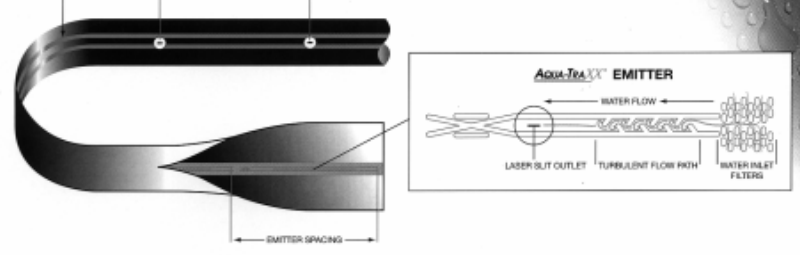

15 mil	4,000'
10 mil	6,000'
8 mil	7,500'

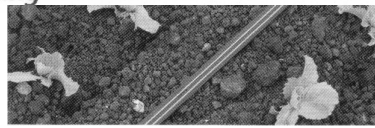

- Aqua-Traxx P.C. Drip Tape**
- 15, 10, 8 mil wall thickness
 - 0.2gph or 0.27gph flow rate
 - 8" & 12" emitter spacing
 - 4-25 psi operating pressure range
 - Blue Stripe "up" to aid installation

Aqua-Traxx P.C. Tape Performance Chart 90% EU

Pressure (psi) →	10 psi		12 psi		14 psi		16 psi		18 psi	
Flow Rate gpm/100'	.50	.67	.50	.67	.50	.67	.50	.67	.50	.67
0% Slope	625'	*	675'	550'	700'	575'	725'	600'	725'	600'
3% Slope Downhill	*	*	850'	700'	875'	700'	900'	725'	925'	725'
6% Slope Downhill	825'	675'	875'	725'	900'	750'	925'	775'	950'	775'



STREAMLINE 630 Thinwall Dripperline


CALL FOR QTY DISCOUNTS

5/8" Tape	Length	Weight
10 mil	7,500'	75 lbs
8 mil	9,000'	63 lbs
6 mil	11,500'	69 lbs

**5/8" Tape Max Run Length
15% flow variation (92% EU) 0% slope**

Emitter (GPH)	.16	.21	.33
8"	930'	400'	310'
12"	1,200'	530'	400'
16"	1,440'	630'	490'
18"	1,560'	690'	530'
24"	1,870'	830'	640'

STREAMLINE Flow Rate vs. Pressure

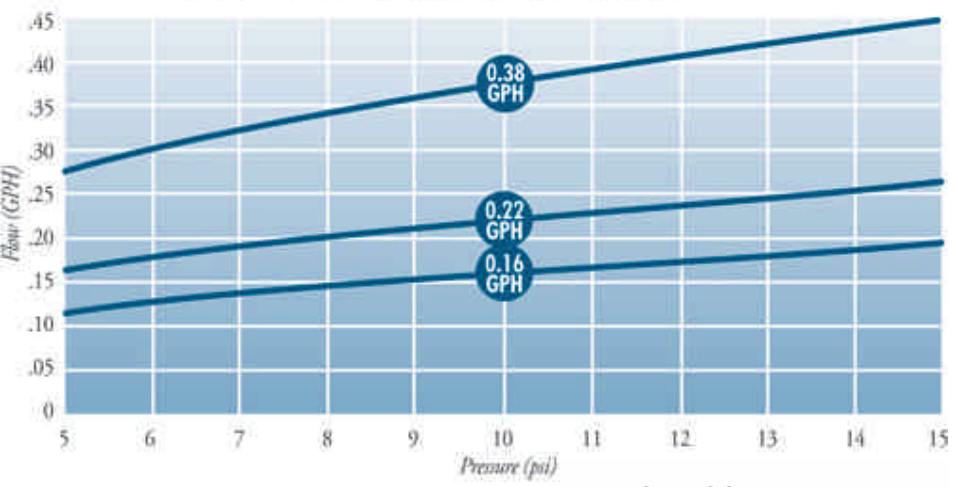

Flow Rates @ 10 psi

	DRIPPER SPACING	8"	12"	16"	18"	24"
.16 gph emitter	GPM/100' →	0.36	0.24	0.18	0.16	0.12
.21 gph emitter	GPM/100' →	0.55	0.36	0.27	0.24	0.18
.33 gph emitter	GPM/100' →	0.83	0.55	0.41	0.37	0.28

