



# WATER AERATOR

TREATWI3


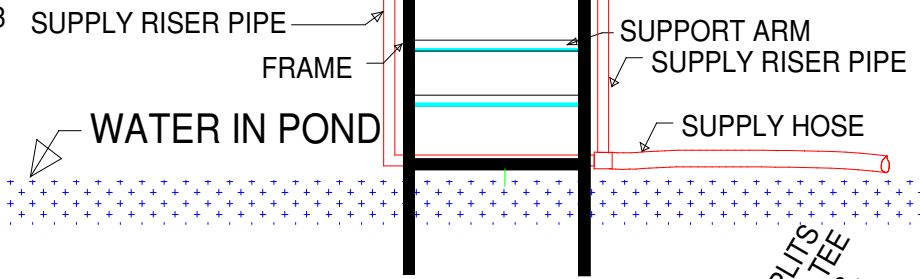


ELEVATION VIEW

THE FLOW FROM THE SUPPLY HOSE SPLITS AND IS CARRIED UP TO THE EXPANDING TEE THROUGH THE TWO SUPPLY RISER PIPES. THE FLOW FALLS THROUGH THE SCREENS BECOMING SATURATED WITH OXYGEN FROM THE AIR. CABLES ATTACHED TO THE TOP OF THE SUPPORT BEAMS PREVENT TILTING OF THE AERATOR.

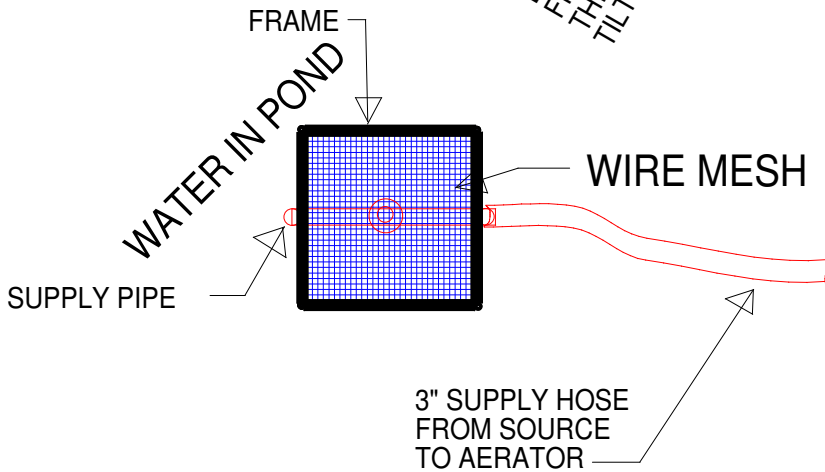


PLAN VIEW



FOUR 4'X4' WIRE MESH SCREENS.

- 20' LENGTH OF 2" PVC PIPE.
- THREE 2" 90° ELBOWS.
- ONE 4" TEE.
- TWO 4" SP X 2" S.
- ONE 3" TEE.
- TWO 3" SP X 2" S.
- ONE 3" SP X 3" BARB.



FOUR 10' LENGTHS & EIGHT 4' LENGTHS OF 2" ANGLE IRON.

SUPPORT ARM

TWELVE 4' LENGTHS OF 1" X1" ANGLE IRON. WELD TO FRAME.



20' LENGTH OF 3" SUPPLY HOSE. TWO 3" CLAMPS.



100' OF 1/4" CABLE WITH 8 TIES, TO PREVENT TILTING

PARTS LIST

800-SAY-RAIN  
IRRIGATION-MART.COM  
WE SAVVY IRRIGATION